


Image not found or type unknown.



Technical information

Productnumber : 75.184.792.123K

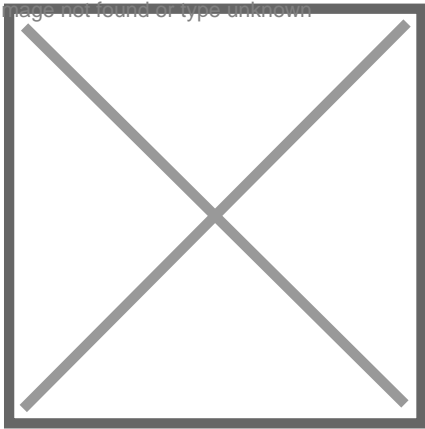

Product description

for more information see manual.

Applications: For medium-heavy transport on flat floors. Low rolling resistance. Relatively insensitive to notches and very wear-resistant. Non-marking tyre, quiet running, hygienic.

Suitable surface: Hard and flat such as tiles, cement and coatings.

Suitable environment: Dry and not permanently damp. With alcohol, glycol and many acids, bases and chemicals.

Specifications

Article arrangement: New

Version: Ø 125 mm

Top: base plate 105x85 mm

Bolt hole: Ø 9 mm

Surface treatment: galvanized

Width (mm): 35

Loading capacity (kg): 200

Wheel bearing: roller bearing

EAN Code (Gtin) 8719424014303

Type: castor wheel with brake

Material: polyurethane rolling surface

Hole centres: 80x60 mm

Colour: colorless

Length (mm): 125

Height (mm): 155

Weight (kg) 1

Type number: 758479

Scan the QR code for more information



KRUIZINGA.NL[®]
Opslag- en transportmiddelen

KRUIZINGA.DE[®]
Lager- und Transportmittel

KRUIZINGA.FR[®]
Stockage et ressources de transport

KRUIZINGA.COM[®]
Material handling equipment